


MEP120

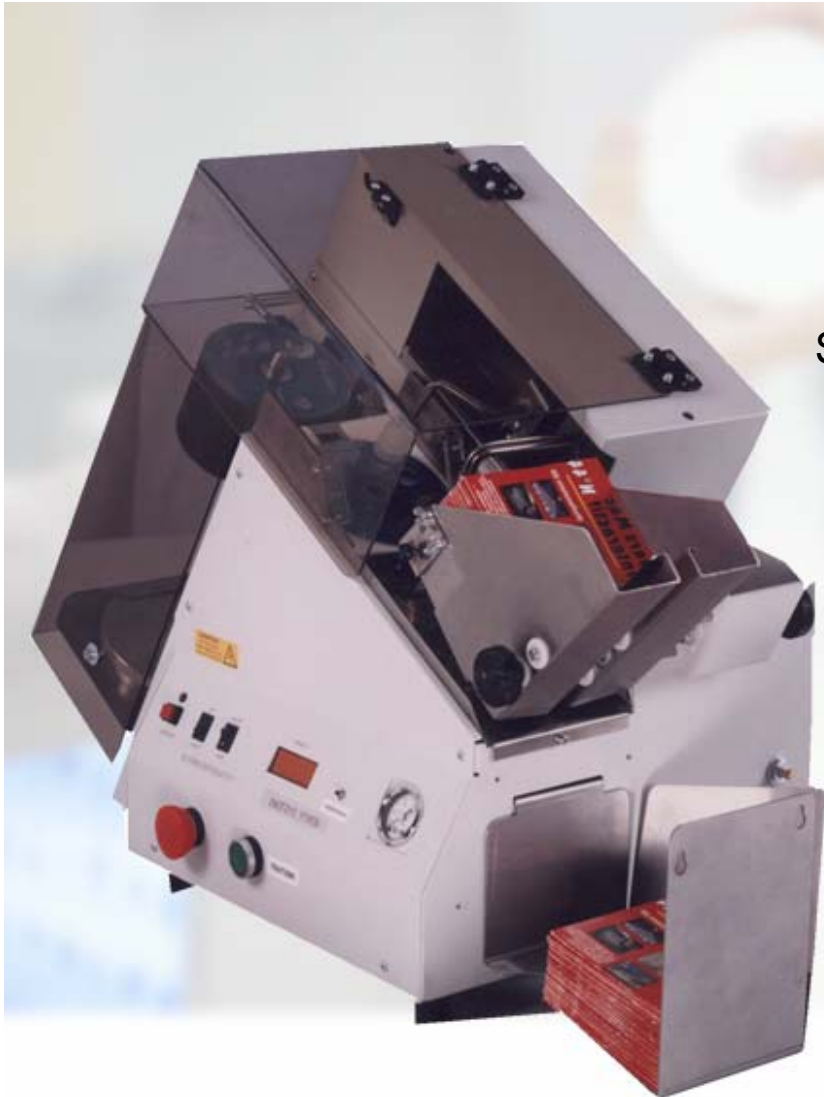

Sleeve up to 50 discs per minute
(3000 per hour)

Paper, card, plastic or
tyvek sleeves

Low cost investment

Table-top unit

Easy to set up and operate



The MEP120 Sleever is designed as an easy-to-use, bench-top unit capable of sleeving CDs in volumes more normally expected from expensive floor mounted models.

Capable of sleeving up to 50 discs per minute, that's over three thousand CD sleeves per hour, the MEP120 can be quickly adapted to deal with different types of sleeves - paper, plastic, tyvek or cardboard - a feature which will be attractive to operators needing to accommodate small runs in their programme.

Stand alone or fully integrated into a packaging line, the CD Sleever MEP120 is reliable and very easy to use. Load the input spindle with discs. Place empty sleeves into the adjacent hopper and press the start button. The arm picks a CD from the top of the spindle and places it onto the CD insertion slide. At the same time, a sleeve is pulled out from the hopper and held open in line with the CD insertion slide. The CD is then pushed into the waiting sleeve. The filled sleeve then slides into the finished product hopper.

The unit has an integral four digit counter so users can easily manage quantities and a selectable automatic stop option (adjustable from 0 - 9999) can also easily be set to stop the sleever after every set run of disks. As an option, an attachment can be fitted to enable self-adhesive paper flap sleeves to be automatically sealed.

The MEP120 provides a versatile, dependable and transportable CD sleeving unit at a price to meet the tightest of budget constraints, whilst the output of up to 50 CDs per minute means it can compete with the more expensive heavyweights.

MEP120

Sleeve Material:	Paper (including glossy) Card, Plastic, Tyvek
Sleeve Sizes:	Width: 5.04" (128mm) Max Depth: 4.7" (120mm) to 5.1" (130mm) Inside Width: 4.8" (122mm) Min Flap Size: 1.5" (38mm) Max
Throughput:	Up to 50 per minute (3000 per hour)
Hopper Capacity:	175 Discs 180 Sleeves (medium thickness)
Operational Voltage:	110/220 VAC 50/60Hz (self adjusting)
Dimensions (WxHxD):	15" x 22" x 31.5" 381mm x 559mm x 800mm
Weight:	84lbs (38kg)
Air Pressure:	2-4 bars 6m ³ /hour (30-60psi @ 3.6CFM)
Vacuum:	800 mbars 3m ³ /hour (2.94psi absolute @1.8CFM)

* Please Note: Air supply is not included but is required. Compressor can be purchased from Verity Systems.



FF130 Flap Folder

Warranty

12 months back to base, all parts and labour included.
Extended warranties also available.

Options

FF130 Flap Folder for self-adhesive sleeves



Verity Systems maintains a policy of continuous improvement and reserves the right to amend this specification without notice.

web: www.veritysystems.com

email: sales@veritysystems.com

tel: +44 (0) 1252 317000

fax: +44 (0) 1252 316555